


38111.7

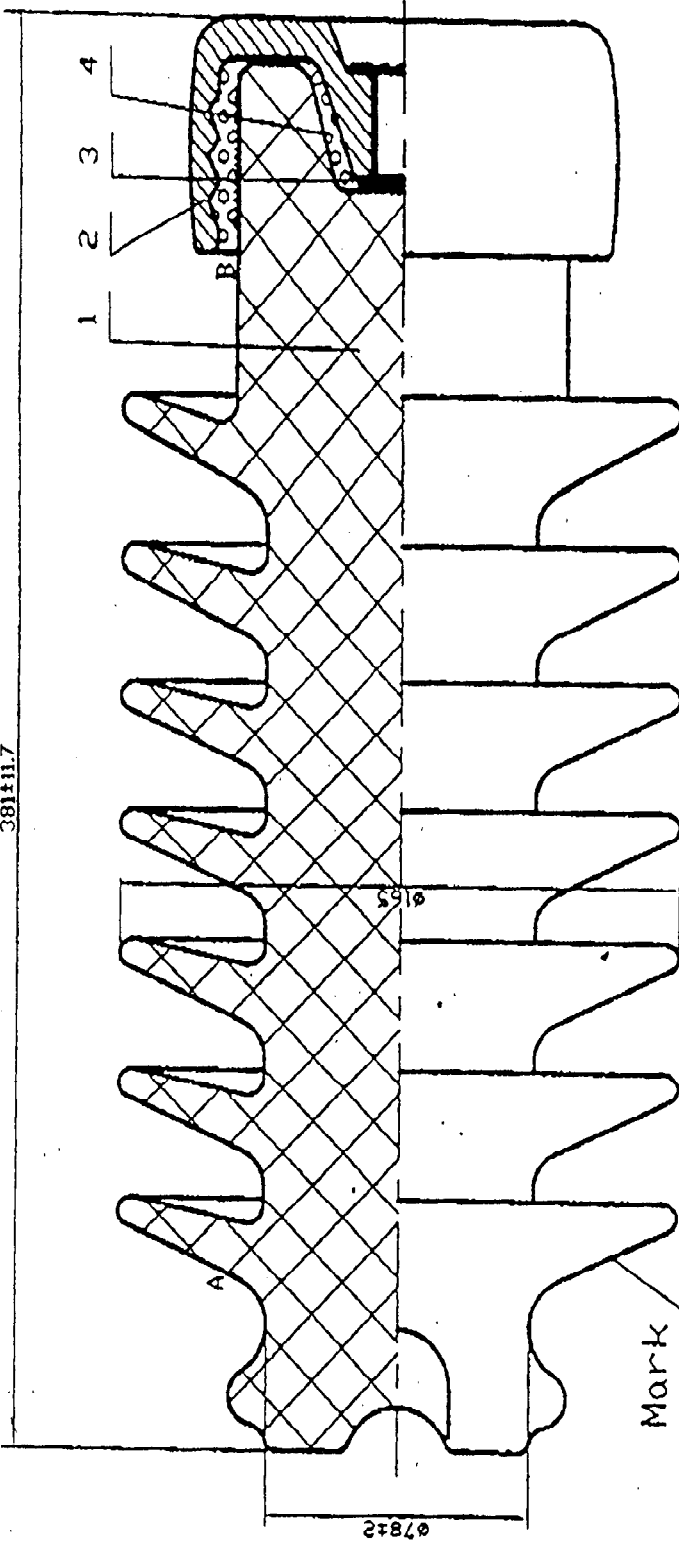

Technical Specification

1. According to the standard ANSI C29.7
2. Nominal creepage distance: 737mm, Arcing distance: 311mm
3. Dry low frequency flashover voltage: 125kV
4. Wet low frequency flashover voltage: 95kV
5. Critical impulse flashover voltage, positive: 200kV
6. Rated cantilever strength: 2800lb
7. Radio interference voltage test voltage: 30kV. Max. RIV. at 1MHz: 200uV

1. Porcelain 2. Basement 3. Crusion 4 Cement

ANSI 57 - 3

P573-24413

Line Post Porcelain Insulator

WEIGHT	UNIT
11.1KG	MM

ASSEMBLY DRAWING

PSN COMPONENT